

THE
Microlift
SERVICE LIFTS RANGE
50 & 100kg



*THE MOST VERSATILE RANGE
OF HIGH QUALITY GOODS
AND SERVICE LIFTS*

Microlift

SERVICE LIFTS

- Food ■ Drinks ■ Documents
- Industrial equipment ■ Small

● Wide range

Four 50kg and two 100kg stock models cater for every lifting requirement – from food, laundry and documents to beer crates and barrels, small trolleys and industrial equipment.

● Quick, simple installation

The Microlift operates inside a rapidly-erected, structure supported frame which is easy to install and requires minimal builder's work. No separate motor room or load-bearing shaft is needed, which helps to keep costs down.

● Available from stock*

All standard models (except Double Decker) are normally available from stock, which means that a Microlift can be installed and working within a few days, depending on the building work.

● Proven quality & reliability

Over 60,000 installations throughout the world are convincing proof of Microlift engineering quality and reliability.

● Choice of finishes

The finish of the lift car and rise and fall shutters can be tough grey baked enamel or stainless steel.

* Combi and bespoke models available on request

OPTIONS:

LOW HEADROOM


DOUBLE DECKER



Provides a significant reduction in the headroom required at the top floor.



Two cars in one lift

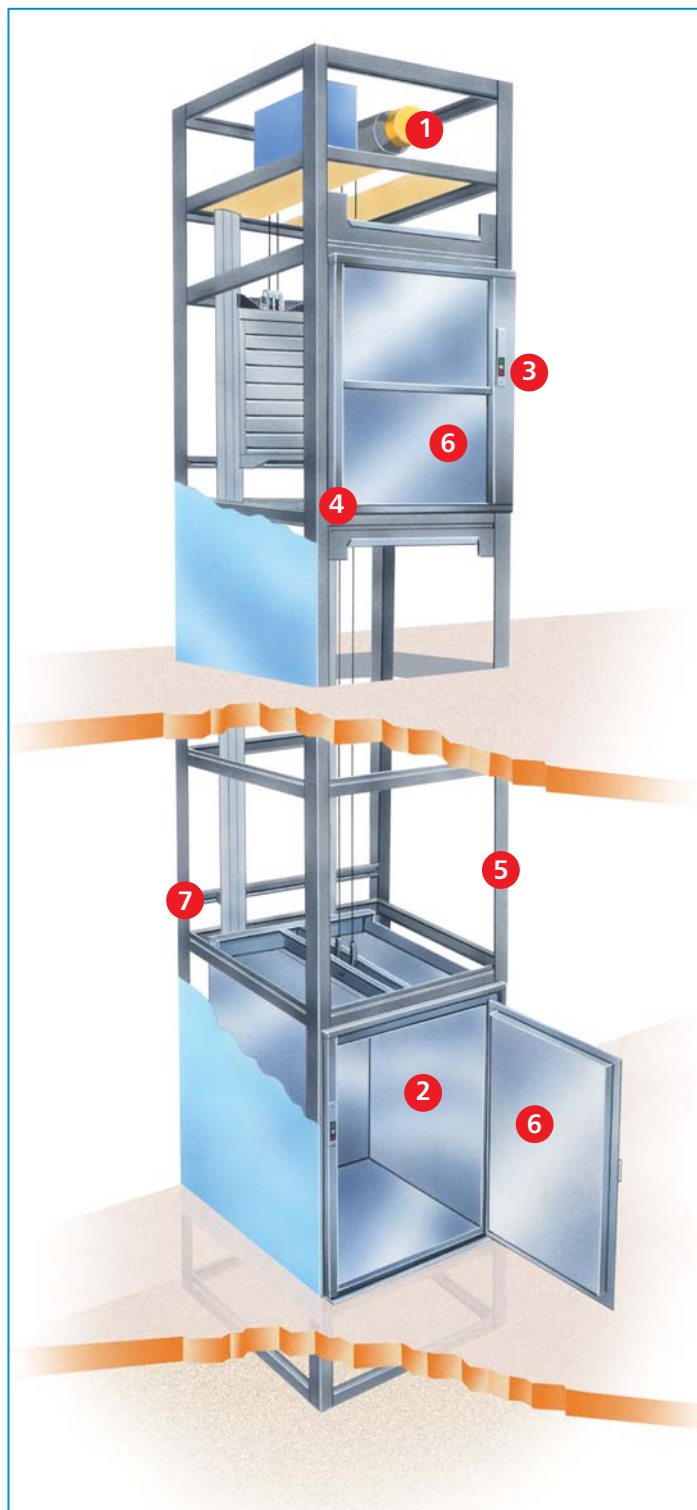

- 1 Quiet and efficient motor
- 2 Easy-clean finish
- 3 Robust push-buttons, fully automatic control
- 4 Interlocked entrances for extra safety
- 5 Galvanised framework for long life
- 6 'Rise and fall' shutters, or hinged doors for ease of access
- 7 Structure supported frame

Microlift

GOODS & SERVICE LIFTS 50 & 100kg

BRIEF SPECIFICATION:

Load:	50kg and 100kg.
Car:	Constructed in mild steel, finished in grey baked enamel with a stainless steel base and a removable stainless steel shelf. The car can also be finished in stainless steel.
Landing Entrances:	High quality rise and fall shutters or hinged doors are fitted with safety locks and can be finished in either grey baked enamel or stainless steel.
Car Entrance Protection:	Whilst it is not essential to fit doors onto the car itself, it is highly recommended to do so. If doors are not fitted, other means of restraining the goods should be assessed and provided. Stainless steel rise and fall doors are available for all models, whilst collapsible gates are available on all models as an option.
Mounting:	The Microlift is supplied in a structure-supported frame which is galvanised for longer life. We do not require a separate motor room or 'load-bearing' lift shaft. For more information, please ask for our builder's work detail.
Floors served:	Can serve up to 12 floors.
Speed:	0.35m/s (70ft/min).
Controls:	Fully automatic push button control, with call and despatch facilities at each entrance. For that extra reassurance, 'lift arrival', 'lift occupied' and 'lift position indicators' together with an 'arrival buzzer' are fitted as standard.
Operation:	The operation is smooth and quiet with a highly efficient motor winding unit with a reliable controller. Combined with a counter-balance drive system, this ensures electrical consumption is minimal.
Winding Unit:	Mounted at the top of the lift structure within the headroom dimensions shown overleaf. The motor drives a high quality reduction gearbox fitted with a traction vee-sheave. An electro-magnetic disc brake is supplied, with emergency release mechanism.
Electric Supply:	415 Volt-3 phase-50Hz or 240 Volt-1 phase-50Hz. A 15 amp isolator should be supplied for the lift by your electrician to be fixed adjacent to the lift at the top floor served.
Installation:	A 2-floor Microlift normally takes us 1-2 days to install depending on site conditions.
Delivery:	Normally available from stock.
Enclosure:	Normally by others.
Maintenance:	We recommend the Microlift is serviced and inspected every 3 months by competent lift engineers. This is to ensure efficient and reliable operation. We can arrange servicing after installation.
Guarantee:	The Microlift is guaranteed for twelve months from completion of installation, subject to it being serviced regularly by our engineers.
Policy:	We are continually developing and improving the Microlift range and reserve the right to alter specifications, dimensions and prices without prior notice .
Safety:	Once installed, tested, commissioned and all the building work is complete, the Microlift will comply with the Essential Safety Regulations (ESRs) of the Supply of Machinery (Safety) Requirements 1992, otherwise known as the Machinery Directive and EN81-3 where applicable.



LANDMARK LIFTS LTD

29 CHARTER GATE, QUARRY PARK CLOSE, MOULTON PARK,
NORTHAMPTON NN3 6QB

t 0800 652 8138 f 01604 495 111 e info@landmarklifts.co.uk

www.landmarklifts.co.uk

Note - all details are correct at time of completion, however, all data may be subject to change without prior notice. These details cannot form part of a written contract